# MONOGRAM 30" BUILT-IN ADVANTIUM® 120



# SPECIFICATIONS

Overall Width	29 3/4" (75.6 cm)
Overall Height	19" (48.3 cm)
Overall Depth	21 1/2" (54.6 cm)
Oven Door Clearance	13" (33.0 cm)
Overall Oven Interior Capacity	1.6 cu. ft. (.05 cu. cm)
Oven Interior Dimensions $(W \times H \times D)$	20 1/16" x 8 1/2" x 17" (51 cm x 21.6 cm x 43.2 cm)
Minimum Cabinet Width	30" (76.2 cm)
Minimum Cabinet Depth	21 1/2" (54.6 cm)
Minimum Base Support	130 lbs (59 kg)
Minimum Base Support Cutout Width	130 lbs (59 kg) 25 1/4" (64.1 cm)
Cutout Width	25 1/4" (64.1 cm)
Cutout Width Cutout Height	25 1/4" (64.1 cm) 17 1/2" (44.5 cm)
Cutout Width Cutout Height Cutout Depth	25 1/4" (64.1 cm) 17 1/2" (44.5 cm) 21 1/2" (54.6 cm) Min
Cutout Width Cutout Height Cutout Depth Voltz/Hertz/Amps	25 1/4" (64.1 cm) 17 1/2" (44.5 cm) 21 1/2" (54.6 cm) Min 120 VAC, 60 Hz, 15A
Cutout Width Cutout Height Cutout Depth Voltz/Hertz/Amps Conduit Length	25 1/4" (64.1 cm) 17 1/2" (44.5 cm) 21 1/2" (54.6 cm) Min 120 VAC, 60 Hz, 15A 48" (121.9 cm)
Cutout Width Cutout Height Cutout Depth Voltz/Hertz/Amps Conduit Length Electrical Rating	25 1/4" (64.1 cm) 17 1/2" (44.5 cm) 21 1/2" (54.6 cm) Min 120 VAC, 60 Hz, 15A 48" (121.9 cm) 1.8 kW at 120V


## ATTENTION ELECTRICIAN:

A 120V, 60Hz, 15 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.


## ELEVATE EVERYTHING"

MONOGRAM


OVERALL DIMENSIONS



FRONT VIEW (SHOWING CUTOUT OVERLAP)



SIDE VIEW




Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


# MONOGRAM 30" BUILT-IN ADVANTIUM® 120


# ZSC1202JSS


### WALL INSTALLATION

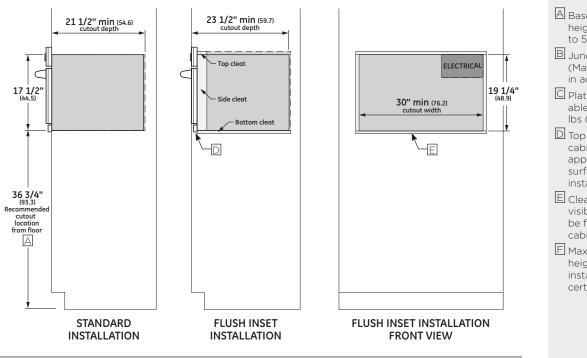

## UNDERCOUNTER INSTALLATION







# NOTES

- A Based on a user height of 5' 6" to 5' 10"
- B Junction box location (May also be located in adjacent cabinet.)
- C Platform must be able to support 130 lbs (59 kg)
- Top surface of cabinet must be an appearance finished surface for flush installation.
- E Cleats may be visible and should be finished to match cabinetry.
- E Maximum toe kick height of 4" when installed beneath a certified cooktop.

# on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For more details, refer to the installation instructions for this product

## ELEVATE EVERYTHING



# MONOGRAM 30" BUILT-IN ADVANTIUM® 120

# ZSC1202JSS

# FEATURES AND BENEFITS

FOUR OVENS IN ONE Speedcook, convection, microwave and warming capabilities

AWARD-WINNING SPEEDCOOK TECHNOLOGY Delivers oven-quality results up to four-times faster than conventional cooking methods with no preheating

TRUE EUROPEAN CONVECTION MODE Bakes, roasts and browns food to perfection

MICROWAVE MODE Provides a fully functioning sensor microwave that allows fast, precise reheating and defrosting

WARMING MODE Keeps prepared dishes at ready-to-serve temperatures

LARGE OVEN INTERIOR Easily accommodates roasts or casserole dishes on a 16" tray that holds a 9" x 13" pan

REMOVABLE OVEN RACK Allows for multi-level convection baking

PROFESSIONAL, STAINLESS STEEL APPEARANCE Designed with chamfered edges, a robust tubular handle and die-cast control knob

PREPROGRAMMED RECIPES Provides quick and easy access to over 175 pre-set food selections and allows programming of up to 30 custom recipes

GLASS TOUCH CONTROLS Feature a smooth clean design that is easy to operate and easy to clean

INSTALLATION FLEXIBILITY Ovens can be installed in 30" wall cabinet and can also be installed undercounter

FLUSH INSTALLATION CAPABILITY Enables the Advantium to be installed flush, even with inset cabinetry, without any additional parts





#### ELEVATE EVERYTHING

